

Oxford naścienny 660


grzejnik odlewany (żeliwny)



Podłączenia




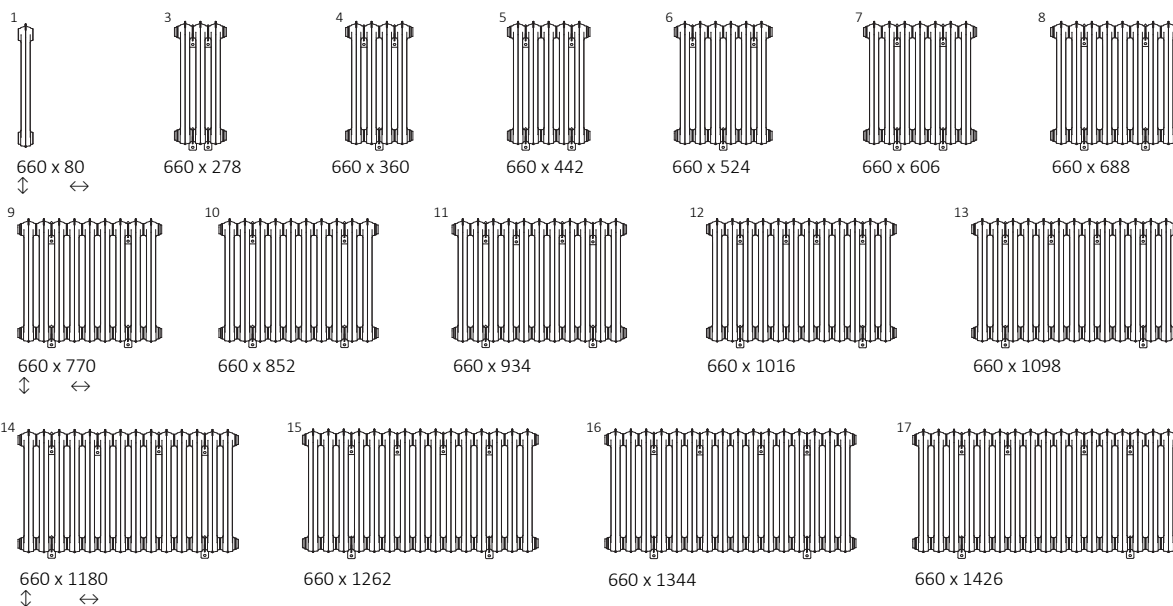

Dostępne rozmiary:



Oxford naścienny 660

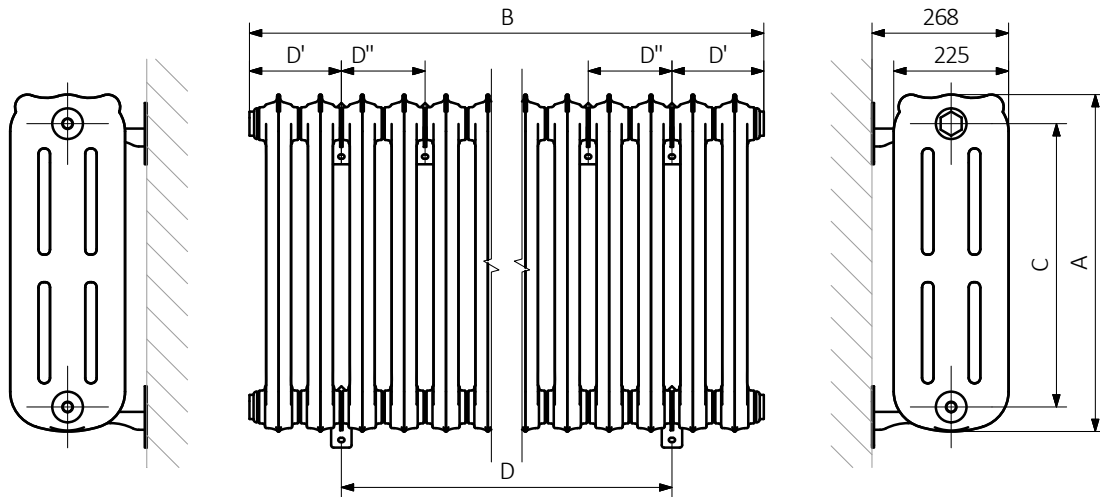grzejnik odlewany (żeliwny)



A	B	C	D	D'	D''	75/65/20	55/45/20		
[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[W]	[W]	[dm ³]	[kg]
660	80	555	-	-	-	143	76	2,25	14,7
660	278	555	82	98	-	429	227	6,75	44,5
660	360	555	-	98	-	572	303	9,00	59,4
660	442	555	246	98	-	715	379	11,25	74,3
660	524	555	-	98	-	858	454	13,50	89,2
660	606	555	246	180	-	1001	530	15,75	104,1
660	688	555	328	180	-	1144	606	18,00	119,0
660	770	555	410	180	-	1287	682	20,25	133,9
660	852	555	492	180	-	1430	757	22,50	148,8
660	934	555	574	180	164	1573	833	24,75	163,7
660	1016	555	656	180	164	1716	909	27,00	178,6
660	1098	555	738	180	164	1859	985	29,25	193,5
660	1180	555	820	180	164	2002	1060	31,50	208,4
660	1262	555	738	262	246	2145	1136	33,75	223,3
660	1344	555	820	262	246	2288	1212	36,00	238,2
660	1426	555	902	262	246	2431	1288	38,25	253,1