

Fresh 100

Bathroom fan



Fan for wall- or ceiling mounting in areas that are in need of exhaust air such as, bathrooms, shower or laundry rooms.

- **Three models**
- **Side entry , for easy installation on external cable**
- **Cold air surge protection**
- **Both roof and wall mounting**
- **The Fan is suitable for installation within Zones 1 & 2.**



Three models

Fresh Basic 197107

DB	2086087
VVS	353426010
SNRO	8502534
LVI	8013252
EFO	4910586
NRF	6551657
SEG	9302602
RSK	8751533

Fresh Timer 197108


DB	2086089
VVS	353426030
SNRO	8502535
LVI	8013253
EFO	4910587
NRF	6551658
SEG	9302603
RSK	8751534

Fresh Timer Humidity 197109

DB	2086090
VVS	353426050
SNRO	8502536
LVI	8013254
EFO	4910595
NRF	6551659
SEG	9302604
RSK	8751535

Technical data

Diameter	100mm
V/Hz	220-240/50
m ³	88
Pressure, Pa	25
W	7,5
dB(A)	32,8
IP	X5 (flush-proof)

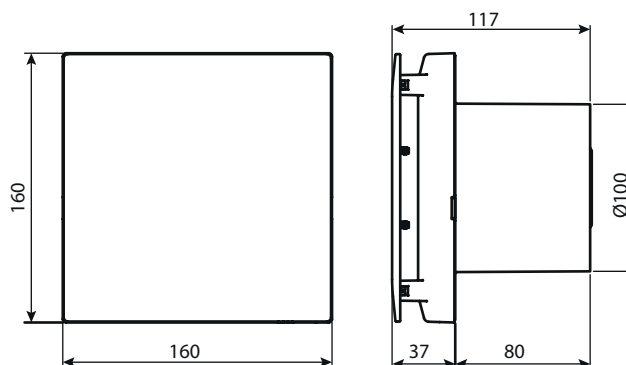

Mounting

The fan can be mounted horizontally or vertically in a channel (either on wall or in ceiling.)

Maintenance

The fan should be cleaned once a year for optimal function.

Before cleaning electrical voltage must be disconnected.

Guarantee

The fan has 5 year warranty for defects of fabrication.

Fresh 100

Bathroom fan

