


Cane



 colour included
in the price



Cane 1900↓ × 390↔ ZX
colour: White Gold

Integrated thermostatic valve, angled, right, chrome
SLIM thermostatic head, chrome
Integrated pipe-masker set, chrome



TERMA
SINCE 1990







colour included
in the price

Design: Jacek Ryń

Standard connection:



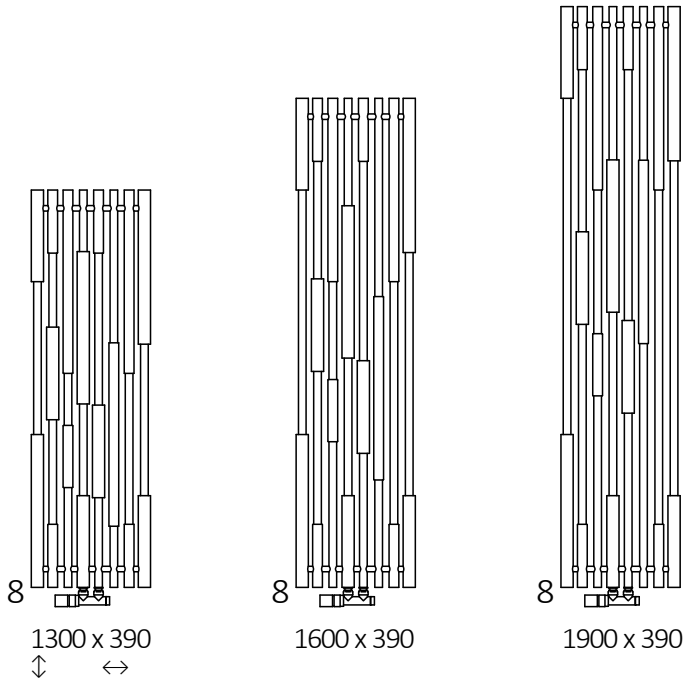


Available sizes:



Specification:

Working pressure: 1000 kPa Maximum operating temperature: 95°C


A ↓ [mm]	B ↔ [mm]	C1 [mm]	75/65/20°C [W]	55/45/20°C [W]	 [W]	D [mm]	E [mm]	F [mm]	 [dm ³]	 [kg]	Product code <small>Configuration code p. 7</small>
1300	390	50	569	300	600	250	1180	60	6,77	13,53	WGCAN130039
1600	390	50	670	354	800	250	1480	60	7,69	15,30	WGCAN160039
1900	390	50	768	405	800	250	1780	60	8,56	17,78	WGCAN190039




colour included
in the price

Technical drawing:



ZX



Z1

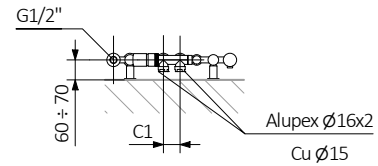


Z8

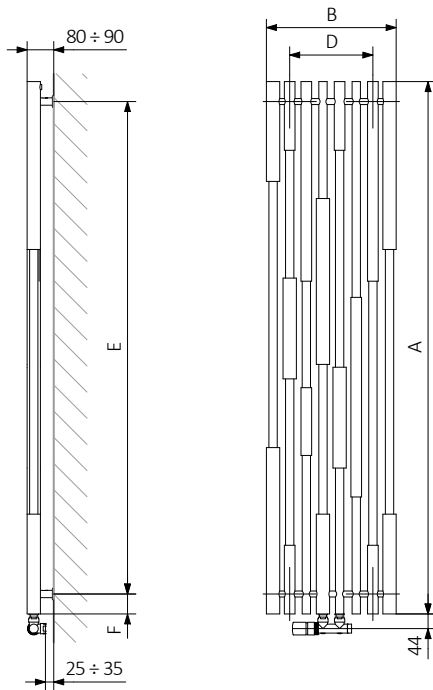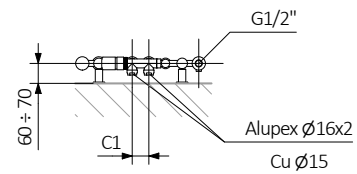

A – Height B – Width C1-C5 – Distance between pipe centres D – Horizontal distance between mounting bracket centres
E – Vertical distance between mounting brackets F – Distance between a mounting bracket and the bottom of the radiator

Collector:

Pipe:






colour included
in the price

Technical drawing:

YL


YP

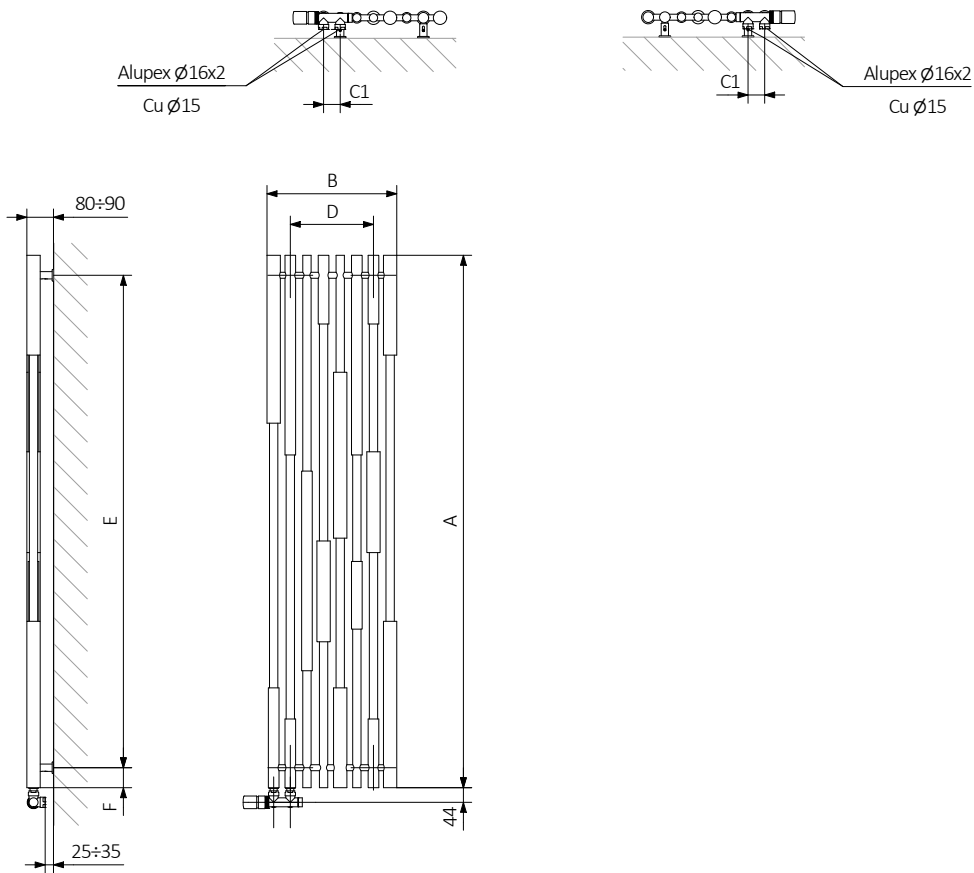

A – Height B – Width C1-C5 – Distance between pipe centres D – Horizontal distance between mounting bracket centres
E – Vertical distance between mounting brackets F – Distance between a mounting bracket and the bottom of the radiator

Collector:

Pipe:








colour included
in the price

Technical drawing:

Y1

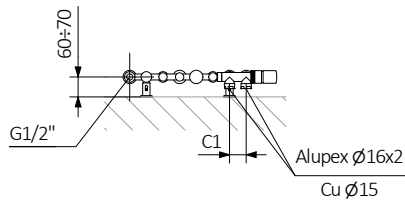


Y8

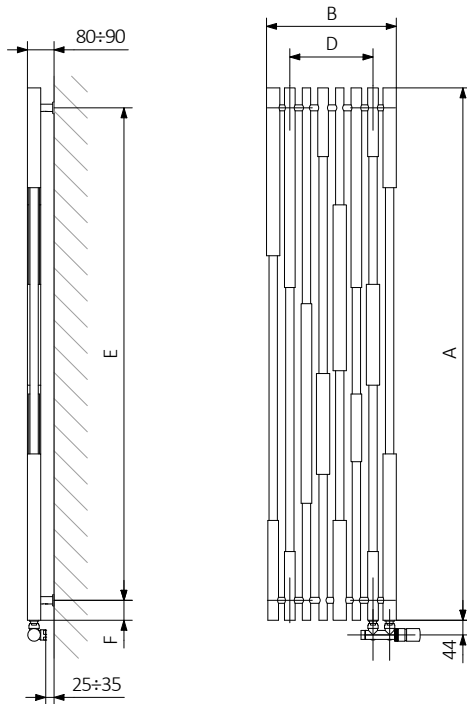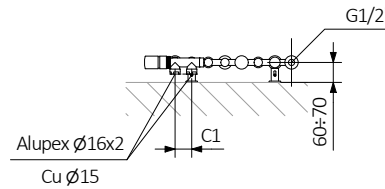

A – Height B – Width C1-C5 – Distance between pipe centres D – Horizontal distance between mounting bracket centres
E – Vertical distance between mounting brackets F – Distance between a mounting bracket and the bottom of the radiator

Collector:

Pipe:





colour included
in the price

In the table with technical data, the last column lists product codes. When placing an order, please remember to quote the product code followed by the configuration code as shown in the diagram below:

The construction of a water and dual fuel radiator product and configuration code:


WGCAN130039

K916ZX

PRODUCT CODE
(located in the table for the product)

CONFIGURATION CODE
(supplemented by hand)


Example Configuration

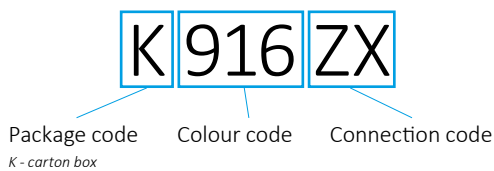

Epoxy primer

E - Code of epoxy primer is an extra processes.

WGCAN130039 K916ZX E — *Extraprocesses or additions code*



Legend



Radiator available in a "water" version.



Radiator suitable for dual fuel connection. Electric heating element can be installed.



Radiator available in electric only version. It comes prefilled with a 'heating medium' and equipped with a heating element. All tested and ready to use.



Connection types dedicated for this radiator. The icon shows the flow and return connections for the radiator as well as the thermostatic valve and heating element position if applicable.



Suggested heating element power output for electric and dual fuel versions.



Weight.



Capacity.



Available in chrome finish.



No additional payment for a color.