

# Oxford naścienny 410

grzejnik odlewany (żeliwny)



Podłączenia




Dostępne rozmiary:




410 x 80  
↕ ↔




410 x 278




410 x 360




410 x 442




410 x 524




410 x 606




410 x 688




410 x 770  
↕ ↔




410 x 852




410 x 934




410 x 1016




410 x 1098




410 x 1180  
↕ ↔



410 x 1262




410 x 1344





410 x 1426

# Oxford naścienny 410

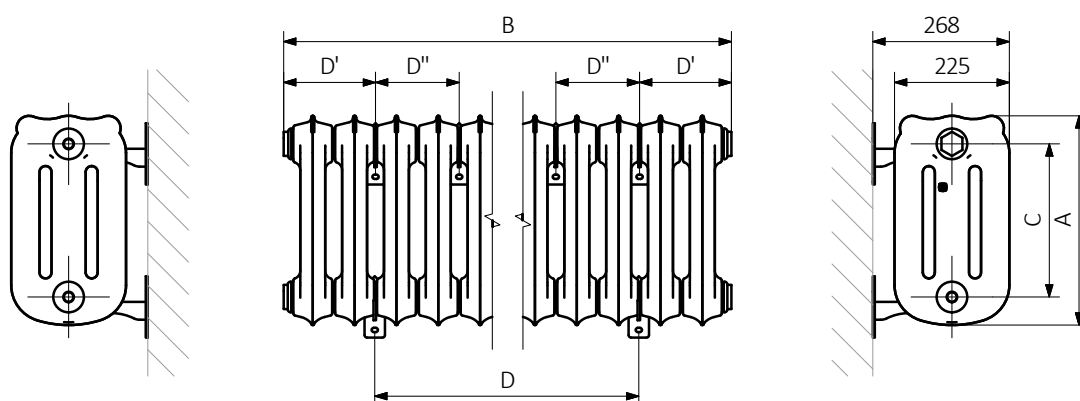grzejnik odlewany (żeliwny)



A	B	C	D	D'	D''	75/65/20	55/45/20		
[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[W]	[W]	[dm <sup>3</sup> ]	[kg]
410	80	297	-	-	-	86	44	1,65	8,1
410	278	297	82	98	-	257	133	4,95	24,7
410	360	297	-	98	-	343	177	6,60	33,0
410	442	297	246	98	-	429	222	8,25	41,3
410	524	297	-	98	-	515	266	9,90	49,6
410	606	297	246	180	-	601	310	11,55	57,9
410	688	297	-	180	-	686	355	13,20	66,2
410	770	297	410	180	-	772	399	14,85	74,5
410	852	297	492	180	-	858	443	16,50	82,8
410	934	297	574	180	164	944	488	18,15	91,1
410	1016	297	656	180	164	1030	532	19,80	99,4
410	1098	297	738	180	164	1115	577	21,45	107,7
410	1180	297	820	180	164	1201	621	23,10	116,0
410	1262	297	738	262	246	1287	665	24,75	124,3
410	1344	297	820	262	246	1373	710	26,40	132,6
410	1426	297	902	262	246	1459	754	28,05	140,9